

KÄRCHER

makes a difference



PROFESSIONAL TO THE CORE.

High performance, self cleaning commercial vacuums.

NT 14/1 ECO ADV



The craftsman's best friend.

More than just another vacuum, the NT 14/1 was developed by craftsmen for craftsmen. Intelligently designed to make the job of a craftsman easier. It's flat top provides a sitting area; It detaches from its base for easy carrying; Large wheels makes it easy to transport; And, its folding handle limits bending and dragging.



1 Folding handle

- No bending down, no dragging. The practical handle turns the vacuum cleaner into a trolley for easy transportation

2 Ample storage

- The NT 14/1 features on-board practical storage for crevice tool, floor tool and suction tube.

Technical data and equipment.

NT 14/1 Eco Advanced

- Folding handle
- Semi-automatic filter cleaning
- Easy to remove suction unit

Technical data	
Container capacity	3.7 gallon (14 l)
Air flow rate	129 cfm
Waterlift	88.6" waterlift
Max. power rating	1380 W
Hose length & diameter	8' x 1.37" (2,438 mm x 35 mm)
Cable length	24' (7.5 m)
Operating noise level	68 dBA
Weight	33 lbs (15 kg)
Dimensions (L x W x H)	21.5" x 18.5" 16.5" (545 mm x 465 mm x 410 mm)
Equipment	
Suction hose with bend, 8' (2.5 m)	■ n
Suction tube, metal 3 x 1' (3 x 0.33 m)	■ n
Filter bag	Paper
Wet and dry floor tool	■ n
Crevice tool	■ n
Order No.	1.510-114.0

- Included in delivery.

NT 68/1



Designed with water pick-up in mind.

The NT 68/1 offers more efficient water pick up with its front mounted and self-adjusting squeegee assembly. It's unique 18 gallon capacity is designed to empty complete without the need for tipping.

1 Designed for productivity

- 18 gallon capacity offers easy mobility for medium to large jobs.
- Front-mounted squeegee offers more productive water pick up

2 Easy to use

- Easy to use, train, operate.
- Unique design results in 100% dumping without tipping.
- Easy squeegee assembly lift.
- Easy to use, train, operate..

Technical data and equipment

NT 68/1

- 24" Front-mounted squeegee
- On-board tool and safety sign storage
- Ergonomic and durable powder-coated handle
- Crush-proof hose
- Large transport wheels

Technical data

Container capacity	18 gallon (68 l)
Vacuum motor	10 AMPS
Waterlift	80"
Max. power rating	1380 W
Cable length	50'
Hose length & diameter	8' x 1.37" (2,438 mm x 35 mm)
Air flow rate	142 cfm
Operating noise level	71 dBA
Weight	64 lbs (29 kg)
Dimensions (L x W x H)	35.5" x 24.5" x 37.5" (901 mm x 622 mm x 953 mm)

Equipment

Squeegee	■	n	■	n	□	
Suction hose with bend, 8' (2.5 m)	■	n	□		■	n
Suction tube, metal 2 x 1.6" (2 x 488 mm)	■	n	□		■	n
Floor tool	■	n	□		■	n
Crevice tool	■	n	□		■	n
Drip tray	■	n	■	n	■	n
Elbow	■	n	□		■	n
Order No.	1.103-494.0		1.103-495.0		1.013-021.0	


■ Included in delivery. □ Available accessories.

NT 35/1 ECO



Efficient vacuum cleaners.

These powerful vacuum cleaners pick up coarse dirt and liquids as well as large quantities of fine dust. Tact, the fully automatic cleaning system, cleans the filter with strong air blasts. Ideal for long periods of uninterrupted use and constant high suction power.

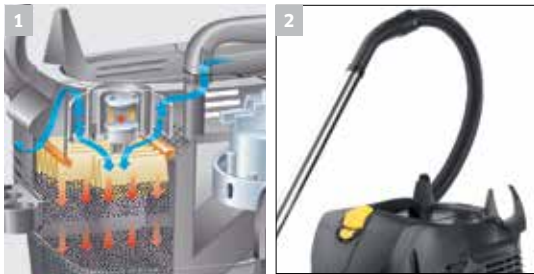

1 Tact system (Auto Filter Clean System)

- The filter is cleaned with strong air blasts. The process is triggered automatically whilst maintaining constant high suction power. Further advantages; low maintenance costs, long filter life.

2 On-board accessory storage

- On-board storage for all accessories, includes two hooks for the suction hose and power cord.

Technical data and equipment.

NT 35/1 Eco

- Tact - Auto Filter Clean System
- Accessory/suction hose storage
- Self-cleaning filter
- No filters to install or remove
- Electronic tank level monitor

Technical data	
Container capacity	9.2 gallon (35 l)
Vacuum motor	8 AMPS
Waterlift	88"
Max. power rating	1,265 W
Filtration system	TACT
Cable length	25' (7.6 m)
Hose length & diameter	8' x 1.37" (2,438 mm x 35 mm)
Air flow rate	120 cfm
Operating noise level	67 dBA
Weight	25.3 lbs (11.5 kg)
Dimensions (L x W x H)	20.4" x 15" x 22.8" (520 mm x 380 mm x 580 mm)
Equipment	
Suction hose with bend, 8' (2.5 m)	■ n
Suction tube, metal 2 x 1.6' (2 x 488 mm)	■ n
Dust bag	2-ply paper
Filter	Washable nylon filter
Wet and dry floor tool	■ n
Crevice tool	■ n
Order No.	1.184-854.0

- Included in delivery.

NT 45/1 TACT



Built to last.

High efficiency, low wear: The motor of the NT 45/1 Tact has no carbon brushes – ideal for hard and long industrial use with a life expectancy of 5,000 hours.

1 Rugged and dependable commercial wet/dry vacuum

- Large rear wheels and front swivel casters for easy maneuverability.
- Metal Wand, Floor Tool, Crevice Tool, and Washable Nylon Filter are included with each NT wet/dry vacuum.
- Crush resistant hose stows conveniently on top for storage.
- Self-cleaning filter.
- Drain hose allows user to empty unit directly into a drain or gutter.

Technical Data and Equipment

NT 45/1 Tact

- Tact – Auto Filter Clean System
- Accessory/suction hose storage
- Self-cleaning filter
- No filters to install or remove
- Electronic tank level monitor

Technical data

Container capacity	11.9 gallon (45 l)
Vacuum motor	8 AMPS
Waterlift	88"
Max. power rating	1,265 W
Filtration system	TACT
Cable length	25' (7.6 m)
Hose length & diameter	8' x 1.37" (2,438 mm x 35 mm)
Air flow rate	120 cfm
Operating noise level	67 dBA
Weight	27.5 lbs (12.5 kg)
Dimensions (L x W x H)	20.4" x 15" x 27" (520 mm x 380 mm x 686 mm)

Equipment

Suction hose with bend, 8' (2.5 m)	■ n
Suction tube, metal 2 x 1.6' (2 x 488 mm)	■ n
Dust bag	2-ply paper
Filter	Washable nylon filter
Wet and dry floor tool	■ n
Crevice tool	■ n
Order No.	1.145-834.0

- Included in delivery.

NT 65/2



For tackling tough jobs for industrial and commercial use.

Two powerful turbines, patented filter system, semi-automatic filter cleaning and large container capacity enable long periods of use with constant suction power.



- 1 On-board storage area**
 - Large on-board storage area for tools and accessories.
- 2 Integrated oil-resistant drainage hose**
 - Easily accessible drainage hose for convenient and safe liquid disposal

Technical data and equipment.

NT 65/2

- Accessory/suction hose storage
- Self-cleaning filter
- No filters to install or remove
- Electronic tank level monitor

Technical data	
Container capacity	17.2 gallon (65 l)
Vacuum motor	18 AMPS
Waterlift	88"
Max. power rating	1,265 W
Filtration system	Power filter clean
Cable length	33' (10 m)
Hose length & diameter	12' x 1.37" (3,658 mm x 35 mm)
Air flow rate	229 cfm
Operating noise level	74 dBA
Weight	41.9 lbs (19 kg)
Dimensions (L x W x H)	23.6" x 18.9" x 36.2" (600 mm x 480 mm x 920 mm)
Equipment	
Suction hose with bend, 8' (2.5 m)	■ n
Suction tube, metal 2 x 1.6' (2 x 488 mm)	■ n
Dust bag	2-ply paper
Filter	Washable nylon filter
Wet and dry floor tool	■ n
Crevice tool	■ n
Order No.	1.325-104.0

■ Included in delivery.

NT 48/1



Standard class – high suction.

These standard class wet and dry vacuum cleaners are ideal for wet and dry vacuuming of small areas with powerful suction performance. Robust, affordable and versatile, they effortlessly pick up dirt and liquid and are ideal for contract cleaners and for use in the automotive industry.



1 Container draining

- An easily accessible drain hose enables convenient and safe container emptying.

2 Accessory storage

- Accessories can be stored at the back of the container.

Technical data and equipment.

NT 48/1

- Optional wet filter bags for water pick up
- Drain hose
- Electronic tank level monitor

Technical data

Container capacity	12.6 gallon (48 l)
Vacuum motor	10 AMPS
Waterlift	80"
Max. power rating	1,200 W
Filtration system	Traditional cylindrical
Cable length	25' (7.6 m)
Hose length & diameter	8' x 1.37" (2,438 mm x 35 mm)
Air flow rate	141 cfm
Operating noise level	66 dBA
Weight	22 lbs (10 kg)
Dimensions (L x W x H)	19" x 15.4" x 30.3" (485 mm x 390 mm x 770 mm)

Equipment

Suction hose with bend, 8' (2.5 m)	■	n
Suction tube, metal 2 x 1.6' (2 x 488 mm)	■	n
Dust bag		Paper
Filter		Cylindrical dust filter
Wet and dry floor tool	■	n
Crevice tool	■	n
Order No.	1.428-623.0	

- Included in delivery.